

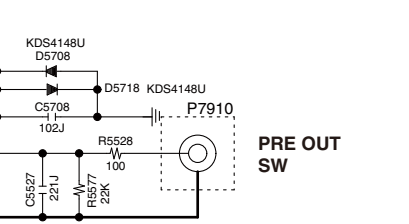
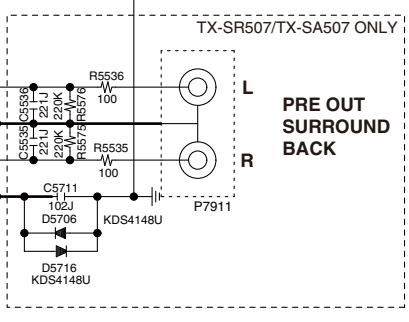
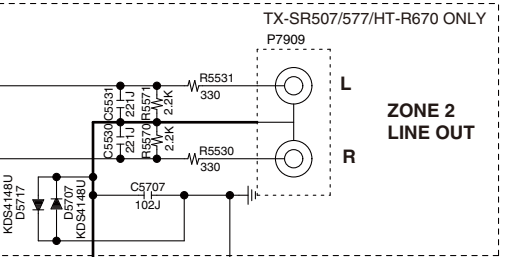
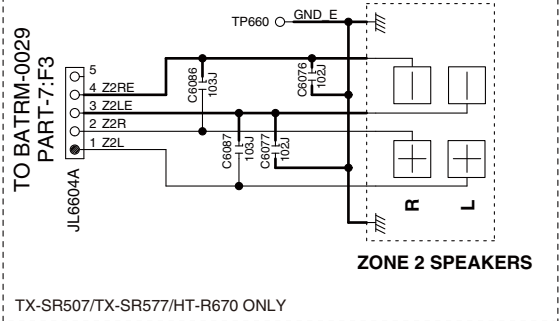


**NOTE**

- \* THE COMPONENTS IDENTIFIED BY MARK Δ ARE CRITICAL FOR SAFETY.
- \* REPLACE ONLY WITH PART NUMBER SPECIFIED.
- \* MAXIMUM VOLTAGE MEASURED AT VOLTAGE IN DC VOLTAGE (NO INPUT SIGNAL).
- \* ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1018-GR UNLESS OTHERWISE NOTED.
- \* ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1818-GR UNLESS OTHERWISE NOTED.
- \* ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- \* ELECTROLYTIC CAPACITORS (  $\frac{\mu}{F}$  ) ARE IN μF.
- \* ALL CAPACITORS ARE IN pF UNLESS OTHERWISE NOTED.
- EX) 10K 0.001 33K 33P 33K 33P 33K 0.033U 33K 0.033U
- \* ALL RESISTORS ARE IN OHMS UNLESS OTHERWISE NOTED.
- EX) 10K 100K 1M PRINTING SIZE OF THE PARTS
- \* "TM" AND "C" ARE SHORT FOR "NOT MOUNTED" AND "NOT CONNECTED". WHICH MEANS NO WIRE IS MOUNTED ON WIRING PATTERN OF PCB.
- \* CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

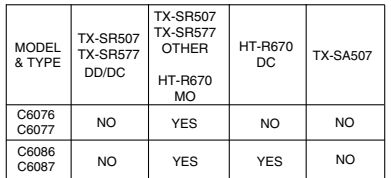

BAAF-0008(2/2)  
PART-4:F6